

# Mercedes-Benz E-Class 2013-2015 radio upgrade installation guide

## NTG 4.5/4.7



1.Original Monitor (Please power off before installation)



2.Pry out the frame of original monitor and remove the fixing screws



3.Pry the buckles on the left side of the air conditioning vent



4.Pry the buckles on the right side of the air conditioning vent



5.Open the glove box and pull down the buckle



6.Pry the top buckles from the air conditioning vent.(Note:Fixed well the vent when prying the buckles)



7.Remove the left and right fixing screws of the original HOST




8.Remove the power harness from original host, and connect it to android harness.



9.Assemble well the stand on original dashboard and put cables well




10.Connect well Android all cables.



11. Assemble Android monitor to the stand, pry out the screw cover and lock the screws.



12.Effect picture after installation



13.Android Cables connector

- 1.4G antenna Port
- 2.GPS antenna Port
- 3.RCA cable LVDS adapter
- 4.RCA Port
- 5.USB Port
- 6.Android Power Interface
- 7.2015/2016year shared CAN interface
- 8.2015/2016year short-circuited wiring interface
- 9.Audio USB port
- 10.2015year CAN interface
- 11.2016year CAN interface
- 12.ISO female plug
- 13.ISO male plug

# Mercedes-Benz E-Class 2015 radio upgrade installation guide

## NTG 5.0




1. Original Monitor (Please power off before installation)



2. Pry the buckles on the left side of the air conditioning vent



3. Pry the buckles on the right side of the air conditioning vent



4. Open the glove box and pull down the buckle



5. Pry the buckles, and remove the air conditioning panel



6. Pry out the decorative frame from the original monitor.



7. Remove the fixing screws from original monitor



8. Remove the left and right fixing screws of the original HOST




9. Remove the power harness from original host, and connect it to Android harness.




12. Plug Audio-USB into USB port of the armrest box




10. Connect original LVDS cable with Android LVDS cable




11. Assemble well the stand on original dashboard and put cables well



12. Assemble Android monitor to the stand, pry out the screw cover and lock the screws.

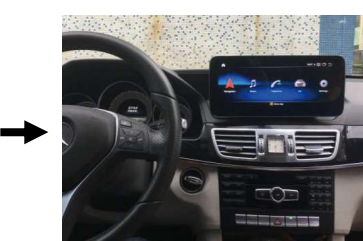

13. Effect picture after installation



14. Android Cables connector

- 1. 4G antenna Port
- 2. GPS antenna Port
- 3. RCA cable LVDS adapter
- 4. RCA Port
- 5. USB Port
- 6. Android Power Interface
- 7. 2015/2016 year shared CAN interface
- 8. 2015/2016 year short-circuite wiring interfaced
- 9. Audio USB port
- 10. 2015 year CAN interface
- 11. 2016 year CAN interface
- 12. ISO female plug
- 13. ISO male plug